

E-FLO



3 YEARS OF WARRANTY*

*3-Yr Warranty only valid for EU

- ➔ Easy maintenance: rapid access to the prefilter (no tools required)
- ➔ Impeller and diffuser made of Noryl®, very hard-wearing and corrosion-resistant
- ➔ Silent and efficient operation
- ➔ Simple installation, supplied with 50/63 mm unions
- ➔ Double drain, easy opening (no tools required)
- ➔ Suitable for use in salt water. AISI316 Mechanical seal
- ➔ Usage: for residential pools up to 198 m³

	Code	Ref.	Hz	P2 Hp	P1 kW	A (mm)	Flow rate (m³/h)*	Weight (kg)	Pack. (mm)	qty/pallet	M.O.Q**	
SINGLE	EFL012607XY1	E-Flo 075M	50	0,75	0,75	590	11,5	13,5	330 x 255 x 650	25	1	
	EFL012610XY1	E-Flo 100M		1,00	1	590	15,4	14	330 x 255 x 650	25	1	
	EFL012615XY1	E-Flo 150M		1,50	1,6	620	21,9	16,5	330 x 255 x 650	25	1	
	EFL012620XY1	E-Flo 200M		2,00	1,92	620	25,7	22,5	330 x 255 x 650	25	1	
	EFL012630XY1	E-Flo 300 M		3,00	2,60	620	33	25	330 x 255 x 650	25	1	
THREE	EFL012630XY3	E-Flo 300 T1 IE3		3,00	2,60	620	33	27	330 x 255 x 650	25	1	IE3 ✓

P1: Input Power P2: Nominal Power

* 10 m water column pressure

** (minimum order quantity)


	Code	Ref.	Hz	P2 Hp	P1 kW	A (mm)	Flow rate (m³/h)*	Weight (kg)	Pack. (mm)	qty/pallet	M.O.Q**	
SINGLE	SPK12607XY16	E-FLO 075M	60	0,75	0,75	590	11,5	13,5	330 x 255 x 650	25	1	
	SPK12610XY16	E-FLO 100M		1,00	1	590	15,4	14	330 x 255 x 650	25	1	
	SPK12615XY16	E-FLO 150M		1,50	1,6	620	21,9	16,5	330 x 255 x 650	25	1	
	SPK12620XY16	E-FLO 200M		2,00	1,92	620	25,7	22,5	330 x 255 x 650	25	1	
	SPK12630XY16	E-FLO 300M		3,00	2,7	620	33	25	330 x 255 x 650	25	1	
THREE	SPK12630XY36	E-FLO 300 T1 IE3		3,00	2,7	620	33	27	330 x 255 x 650	25	1	IE3 ✓

P1: Input Power P2: Nominal Power

* 10 m water column pressure


** (minimum order quantity)

Water column pressure (m) E-Flo

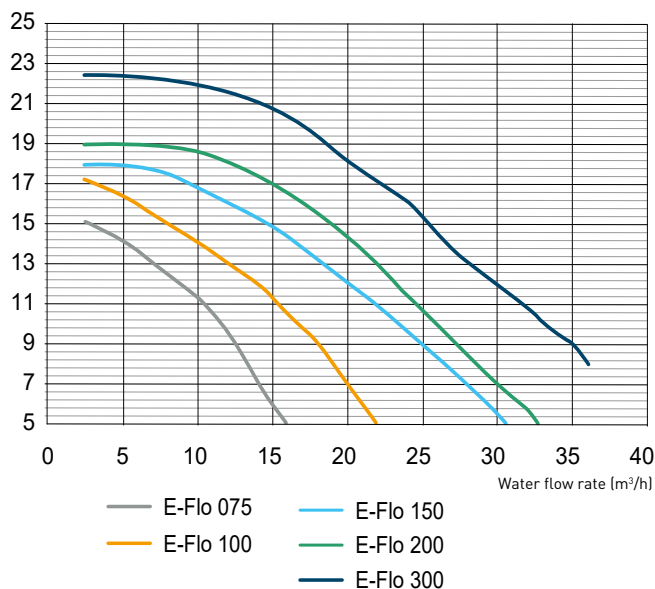

Technical Specifications

Max. water temp. / Max. pressure	50°C/ 2,5 bar
Connection [DIN slip included, for others please ask]	Ø 50 mm (0,33 - 1 HP) / Ø 63 mm (1,5 - 3 HP)
Mechanical seal	AISI 316, suitable for sea water
Motor-drive specifications	TEFC, Class F, IP55, 50 Hz, 2850 rpm
Housing/impeller/strainer/lid	PP + F.G/Noryl®/PP/SAN®

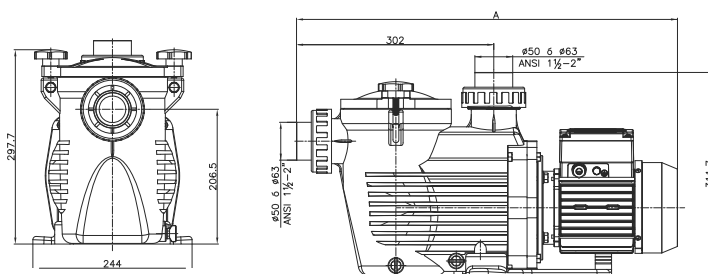

Dimensions